



高效节能
Efficient and
Energy-saving



运行稳定
Stable
Operation



结构合理
Reasonable
Structure




用途宽广
Widely
Application

NW 低加疏水泵

NW Series

Low Pressure Heater Drainage Pump

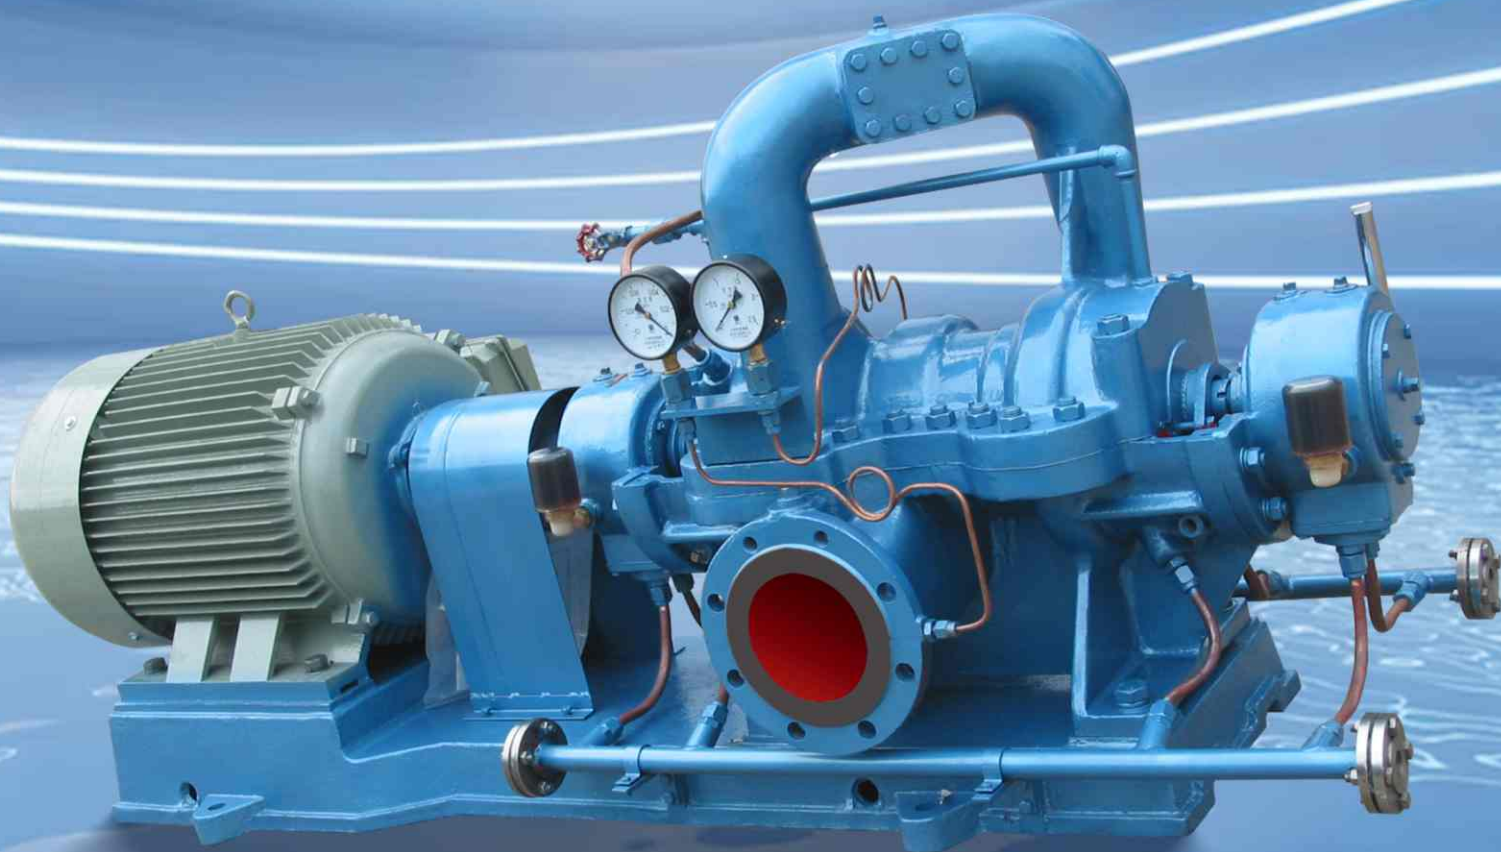

上海水泵制造有限公司

SHANGHAI PUMP MANUFACTURE CO.,LTD.

地址:上海市奉贤区青伟路500弄230号 Add.: No.230,Lane500, Qingwei Road, Qingcun Town, Fengxian District, Shanghai, China

电话Tel: 021-37595000 / 服务热线Tel: 18901621777 / 网址Web: www.spmc.cc / 邮箱Email: sales@spmc.cc



NW 低加疏水泵

Low Pressure Heater Drainage Pump

产品概述 Product Overview

NW型低加疏水泵, 用于电厂输送低压加热器疏水, 介质温度 $\leq 120^{\circ}\text{C}$ 。
该系列泵汽蚀性能好, 适用于低NPSHr工况的工作条件。

NW Series Low Pressure Heater Drainage Pump is used for conveying the water in low pressure heater for power station, which medium temperature $\leq 120^{\circ}\text{C}$.

This series of pumps has good cavitation performance and is suitable for low NPSHr working conditions.

250 NW - 44 x 6

- ① 进口直径250毫米
Suction Diameter 250mm
- ② 卧式疏水泵
Horizontal Drainage Pump
- ③ 单级扬程44米
Single Stage Head 44m
- ④ 级数6级
Stage for 6



High-efficiency, Energy-saving
Low Pressure Heater Drain Water Pump for 1000MW Thermal Power Plant

1000MW 火力发电厂高效节能低加疏水泵

强劲动力
Strong power

技术参数 Technical Parameters

流量: 28.5-205m ³ /h	Capacity: 28.5-205m ³ /h
扬程: 122-350m	Head: 122-350m
功率: 30-315kw	Power: 30-315kw
口径: 80-250mm	Sizes: 80-250mm
转速: 1450-2980r/min	Speed: 1450-2980r/min