



高效节能  
Efficient and  
Energy-saving



运行稳定  
Stable  
Operation



结构合理  
Reasonable  
Structure




用途宽广  
Widely  
Application

# MF/MN

## 卧式(立式)蜗壳泵

MF/MN Series

Horizontal (Vertical) Volute Casing Pump

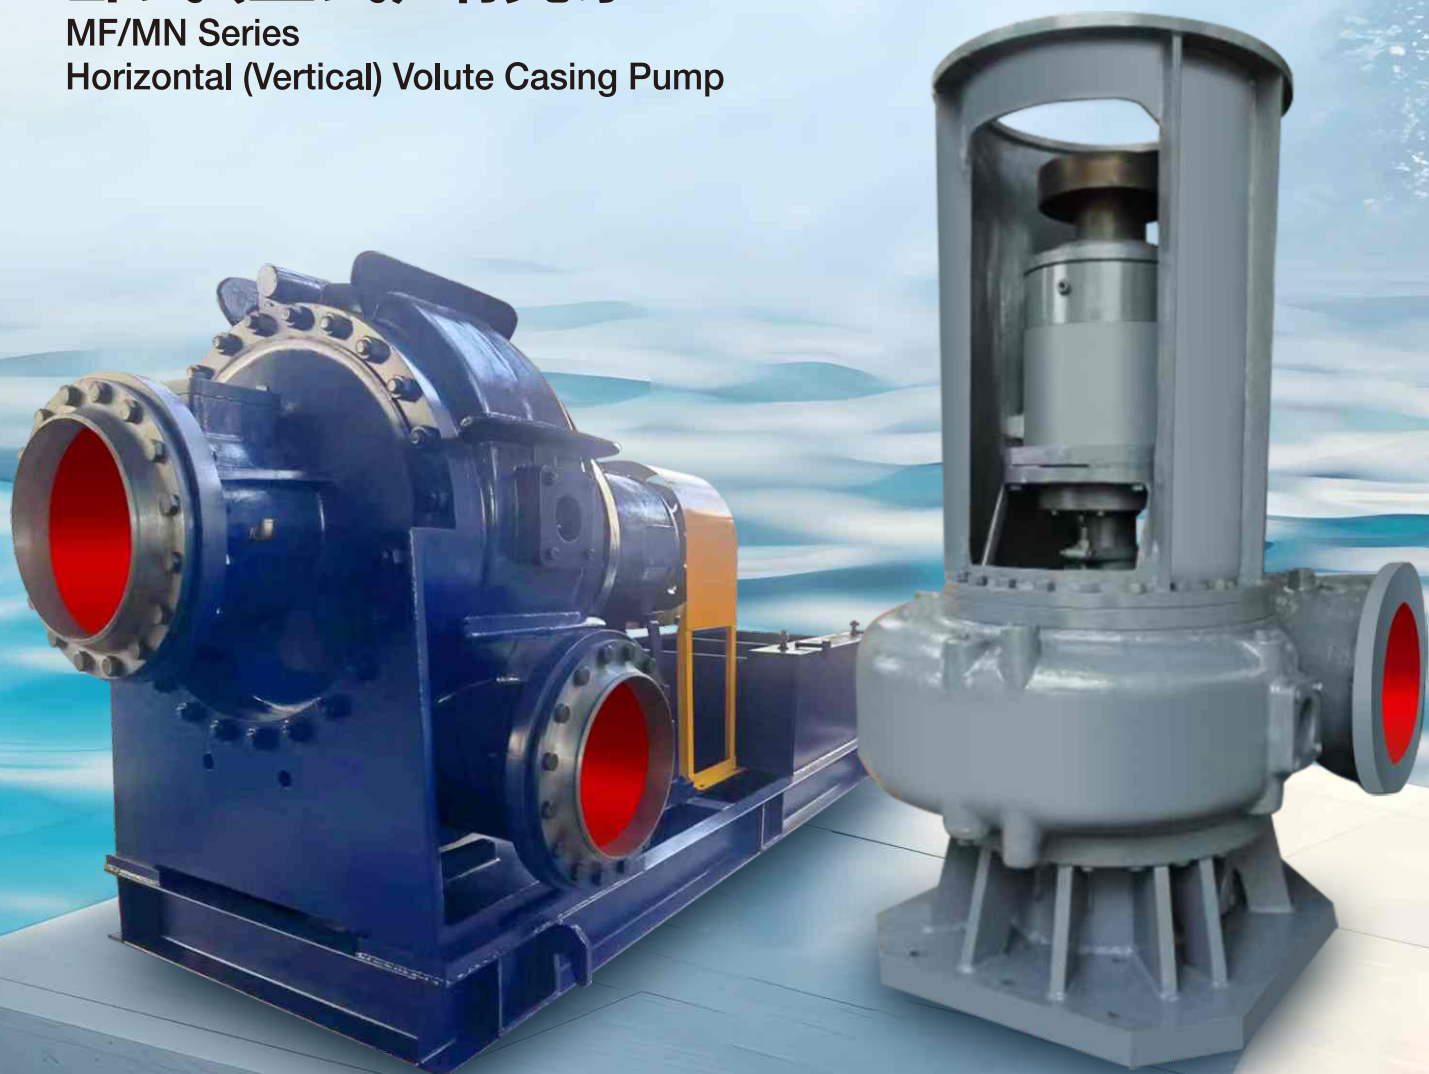

### 上海水泵制造有限公司

SHANGHAI PUMP MANUFACTURE CO.,LTD.

地址:上海市奉贤区青伟路500弄230号 Add.: No.230,Lane500, Qingwei Road, Qingcun Town, Fengxian District, Shanghai, China

电话Tel: 021-37595000 / 服务热线Tel: 18901621777 / 网址Web: [www.spmc.cc](http://www.spmc.cc) / 邮箱Email: [sales@spmc.cc](mailto:sales@spmc.cc)



# MF/MN 卧式(立式)蜗壳泵

Horizontal (Vertical) Volute Casing Pump

## 产品概述 Product Overview

MF、MN 型系列卧式(立式)蜗壳泵是引进美国DRESSER泵公司技术的产品,由于运行可靠、效率高耗能少而深受欢迎,该泵有多种型号和不同结构形式可供选用。  
适用于输送工业废水和城市生活污水,最大优点是所输送含有固体颗粒和含有纤维材料的污水,还适用于电厂循环泵、灌溉用泵及其它用途。

The MF、MN Series Horizontal (Vertical) Volute Casing Pumps are hot products based on technology introduction of US DRESSER Pump, and are popular for reliable operation, high efficiency and low energy consumption, and could be a variety of models and configurations.  
They used for conveying industrial wastewater and urban living waste water especially with solid particle and fibers, and also applied in power plant circulation, farmland irrigation and other fields.

## 型号说明 Type Description

### MF型卧式(立式)蜗壳泵按结构和安装特点分为下列三种

MF type horizontal (vertical) volute casing pumps has following three types according to the structure and installation characteristics

MF -- 单级单吸直管进口卧式泵


MF -- Single stage single suction straight pipe inlet horizontal pump

MFC -- 单级单吸弯管进口电机直连立式泵

MFC -- Single stage single suction elbow inlet motor directly connected vertical pump

MFV -- 单级单吸弯管进口,加长轴,万向节联接立式泵

MFV -- Single stage single suction elbow inlet, extended shaft, universal joint connection vertical pump

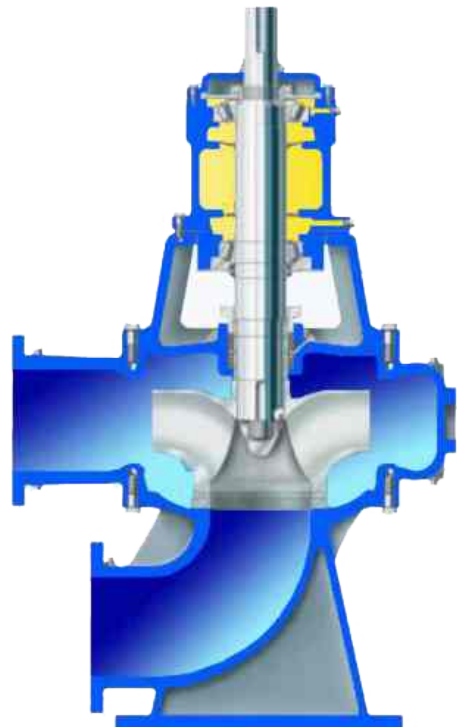

### 8 - MF 13 - B

① ② ③ ④

① 表示泵出口口径为8英寸  
Pump Discharge Diameter (Inch)

② 表示MF型卧式(立式)蜗壳泵  
MF Type Horizontal (Vertical) Volute Casing Pump

③ 表示叶轮名义直径13英寸  
Nominal Diameter of Impeller (Inch)

④ 表示叶轮为B  
B Type Impeller

### MN型卧式(立式)蜗壳泵按结构和安装特点分为下列五种

MN type horizontal (vertical) volute casing pumps has following five types according to the structure and installation characteristics

MN -- 单级单吸直管进水卧式蜗壳泵

MN -- Single stage single suction straight pipe intake horizontal volute casing pump

MNC -- 单级单吸弯管进水电机直连的立式蜗壳泵

MNC -- Single stage single suction elbow inlet motor directly connected vertical volute casing pump

MNV -- 单级单吸弯管进水带万向节传动轴的立式蜗壳泵

MNV -- Single stage single suction bent-inlet vertical volute casing pump with universal joint drive shaft.

MNF -- 单级单吸直管进水电机直连的立式蜗壳泵

MNF -- Single stage single suction straight tube inlet motor directly connected vertical volute casing pump

MNZ -- 单级单吸直管进水带万向节传动轴的立式蜗壳泵

MNZ -- Single stage single suction straight tube inlet with universal joint shaft vertical volute casing pump

### 14 MNC - 16 A

① ② ③ ④

① 表示泵的出水口径为14英寸  
Pump Discharge Diameter (Inch)

② 表示单级单吸弯管进水电机直连的立式蜗壳泵  
Single stage single suction bent inlet motor directly connected vertical volute casing pump

③ 表示叶轮外径名义尺寸为16英寸  
Nominal Outside Diameter of Impeller (Inch)

④ 表示为A叶轮  
A Type Impeller

**强劲动力**  
Strong power

## 技术参数 Technical Parameters

|                               |                                     |
|-------------------------------|-------------------------------------|
| 流量: 50-28000m <sup>3</sup> /h | Capacity: 50-28000m <sup>3</sup> /h |
| 扬程: 3.8-50m                   | Head: 3.8-50m                       |
| 功率: 2.2-2000kw                | Power: 2.2-2000kw                   |
| 口径: 75-1200mm                 | Sizes: 75-1200mm                    |
| 转速: 290-1480r/min             | Speed: 290-1480r/min                |